

TUNING FORK CRYSTAL UNIT



NXG Series 2.0 x 6.0

  	Application :
	- Typically used for real time clock application - Mobile Phone / Set-top Box - Notebook PC / Portable PC - Car navigation systems - Wireless LAN
	Features :
	- Meet clock signal for tight tolerance requirement - High stability assured with tight vacuum sealing - High vibration and shock resistance - Industry standard package - RoHS compliant / Pb free

Electrical Specification :

Model	NXG 2-6
Frequency	32.768 KHz
Frequency Tolerance	±20 or ±50 ppm
Operating Temp Range	-10°C~ +60°C, -20°C~ +70°C
Temperature Coefficient (Frequency)	-0.04 ppm ± 0.006 ppm / °C ² (TYP.)
Load Capacitance	12.5 pF
Drive Level	1uW ~ 10uW
Resonance Resistance	55 KΩ
Shunt Capacitance	5 pF max (TYP.)
Oscillation Mode	Fundamental
Soldering Condition	Under 235°C with 5sec (Do not heat the package to more than 150°C)

* Above specification subject to change without prior notice, please consult our sales representative for more information*

SHENZHEN - Shenzhen Huilicheng Electronic Technology Co.,Ltd. HONGKONG - HUILICHENG ELECTRONICS(HK)CO.,LIMITED

Address: 6910b,Seg Plaza,No.1002 North Huaqiang Road,Fuqiang Community,Huaqiang North Street,Shenzhen,Guangdong,China


Tel: +86-0755-83576022

E-mail: hlc-zzw@hlcdzjk.com

Fax: 0755-83778079

Web: <http://www.hlcdzjk.com>

Dimensions (mm) :

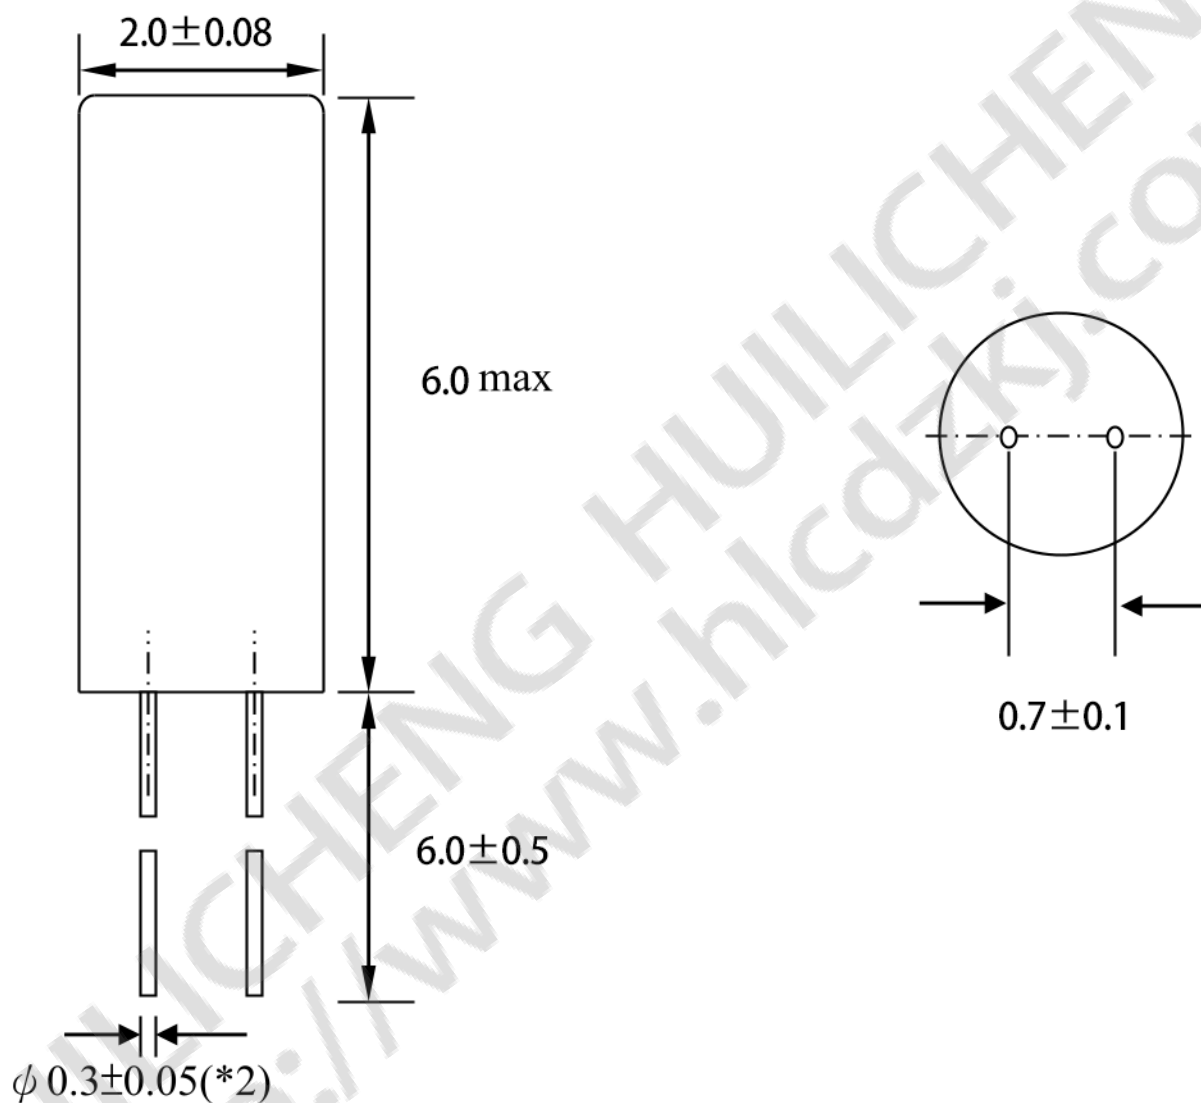

* Above specification subject to change without prior notice, please consult our sales representative for more information*

SHENZHEN - Shenzhen Huilicheng Electronic Technology Co.,Ltd. HONGKONG - HUILICHENG ELECTRONICS(HK)CO.,LIMITED

Address: 6910b,Seg Plaza,No.1002 North Huaqiang Road,Fuqiang Community,Huaqiang North Street,Shenzhen,Guangdong,China

Tel: +86-0755-83576022

E-mail: hlc-zzw@hlcdzjkj.com

Fax: 0755-83778079

Web: <http://www.hlcdzjkj.com>